


# Full Features System

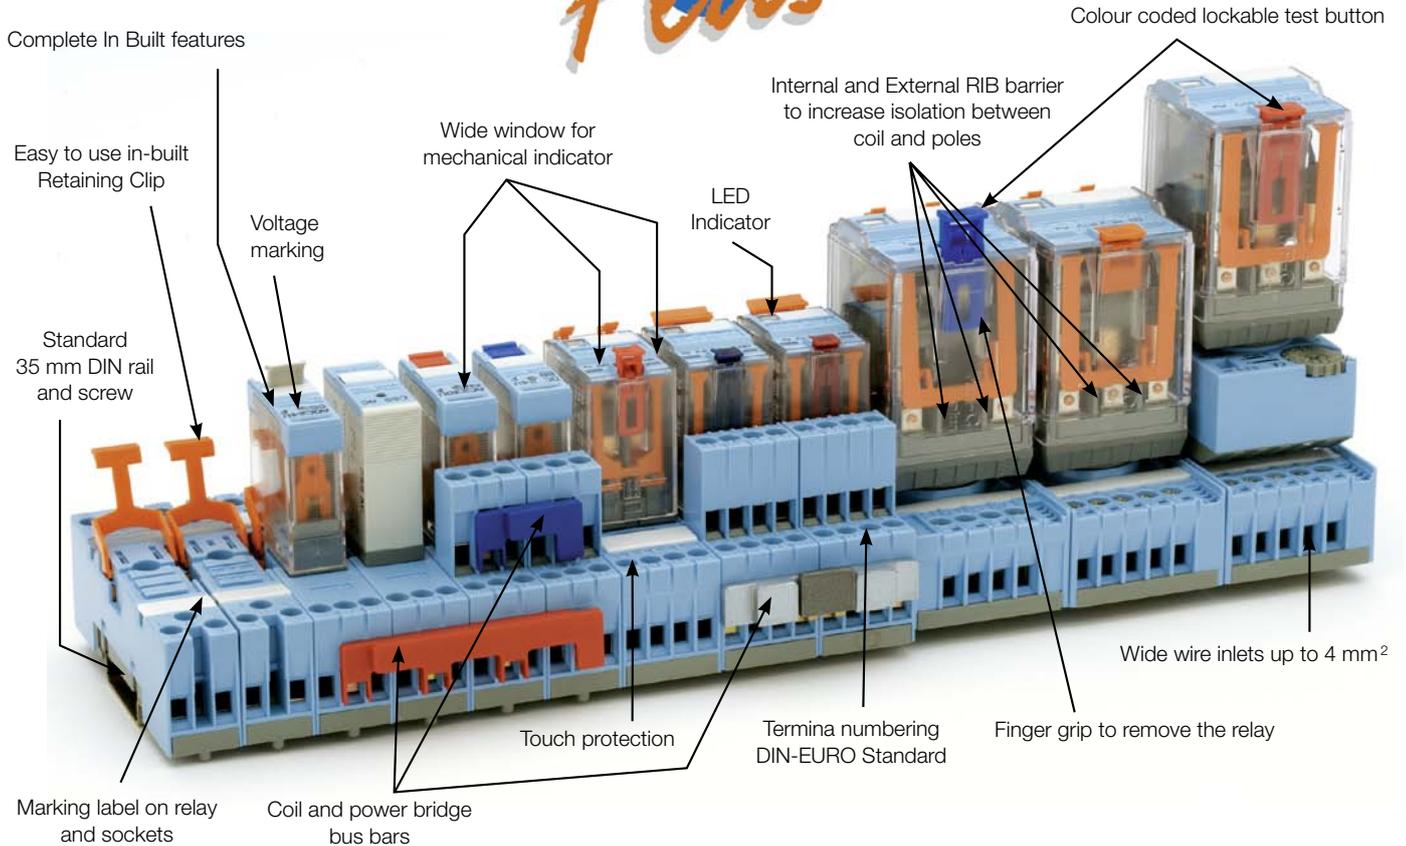

## Five colours for an easier identification of coil voltage

-  **AC** red: 230 VAC (North America 120 VAC)
-  **AC** dark red: others VAC
-  **AU** grey: VAC/DC
-  **DC** blue: 24 VDC
-  **DC** dark blue: others VDC


If you don't want to have the lockable function, you can use the orange "orange - push button". SO - OP for MRC - C and S9 - OP for QRC (5 pieces bag)

 Orange - push button

A black blanking plug is available if you don't want a test button. S= - NP for MR - C and S9 - NP for QRC (5 pieces bag)

 Blanking plug

## Comprehensive technical label



Part number  
Coil details  
Additional circuit diagram for coil  
Electric diagram showing all additions to the coil  
Wiring diagram with sequential and DIN numbers  
Maximum switching capacity according to EN 60947 (IEC 947)  
Approvals

| Country | Approval   | Country        | Approval  |
|---------|--|----------------|---|
| Canada  |  Authority: CSA<br>Specification: C 22,2: UL 508                    | United Kingdom |  Authority: Loyd's Register of Shipping         |
| China   |  Authority: CQC<br>Specification: GB14048.5-2001                    | USA            |  Authority: UL<br>Specification: C 22,2; UL 508 |
| Russia  |  Authority: KORPORATSIA STANDART<br>Specification: GOST R 50030.5.1 |                |   |



**Kühn Controls AG**

**Notes:**

You want more information about this product, please call us: tel: +49 (0)7082-940000 or send us a fax: +49 (0)7082-940001, or email: [sales@kuehn-controls.de](mailto:sales@kuehn-controls.de) or visit our Website: [www.kuehn-controls.de](http://www.kuehn-controls.de)